




DIN 912

Benzeri - Similar - Ähnlich
DIN EN ISO 4762

- İmbus Civata
- Hexagon Socket Head Cap Screws
- Zylinderschrauben mit Innensechskant

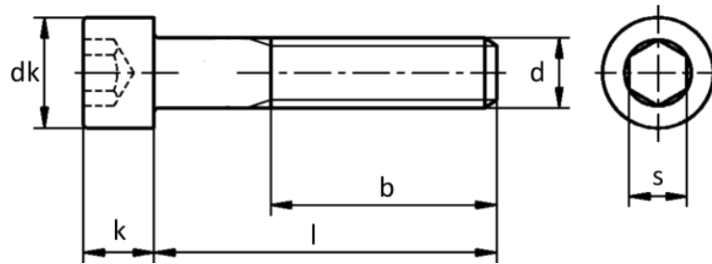

d	M 1,4	M 1,6	M 2	M 2,5	M 3	M 4	M 5	M 6	M 8	M 10
P (pitch)	0,3	0,35	0,4	0,45	0,5	0,7	0,8	1	1,25 (1,00)	1,5 (1,25)(1,00)
k (max)	1,4	1,6	2	2,5	3	4	5	6	8	10
dk (max)	2,6	3	3,8	4,5	5,5	7	8,5	10	13	16
s	1,3	1,5	1,5	2	2,5	3	4	5	6	8
b	14	15	16	17	18	20	22	24	28	32
l	2-12	2,5-16	3-20	4-25	5-30	6-40	8-50	10-60	12-80	16-100

d	M 12	M 14	M 16	M 18	M 20	M 22	M 24	M 27	M 30	M 33
P (pitch)	1,75 (1,25)(1,5)	2 (1,5)	2 (1,5)	2,5 (1,5)(2,0)	2,5 (1,5)(2,0)	2,5 (1,5)(2,0)	3 (2,0)	3 (2,0)	3,5 (2,0)	3,5 (2,0)
k (max)	12	14	16	18	20	22	24	27	30	33
dk (max)	18	21	24	27	30	33	36	40	45	50
s	10	12	14	14	17	17	19	19	22	24
b	36	40	44	48	52	56	60	66	72	78
l	20-120	25-140	25-160	30-180	30-200	35-200	40-200	45-200	45-200	50-300



POLAR
=FASTENERS=

d	M 36	M 42	M 48	M 56	M 64	M 72	M 80	M 90	M 100
P (pitch)	4 (3)	4,5 (3)	5 (3)	6,5 (4)	6 (4)	6 (4)	6 (4)	6 (4)	6 (4)
k (max)	36	42	48	56	64	72	80	90	100
dk (max)	54	63	72	84	96	108	120	135	150
s	27	32	36	41	46	55	65	75	85
b	84	96	108	124	140	156	172	192	212
l	55-300	60-300	70-300	80-300	90-300	100-300	120-300	140-300	150-300