




## DIN EN ISO 7040

Benzeri - Similar - Ähnlich  
DIN 6924  
DIN 982

- Altıköşe Fiberli Somun
- Prevailing Torque Type Hexagon Nuts with non-metallic Insert
- Sechskantmuttern mit Klemmteil, nichtmetallischer Einsatz

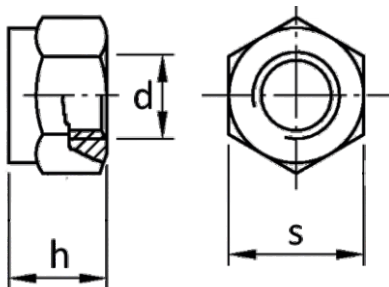

d	M 3	M 4	M 5	M 6	M 8	M 10	M 12
P (pitch)	0,5	0,7	0,8	1	1,25	1,5	1,75
h (max)	4,5	6	6,8	8	9,5	11,9	14,9
s (max)	5,5	7	8	10	13	16	18

d	M 14	M 16	M 20	M 24	M 30	M 36
P (pitch)	2	2	2,5	3	3,5	4
h (max)	17	19,1	22,8	27,1	32,6	38,9
s (max)	21	24	30	36	46	55