




POLAR
=FASTENERS=

DIN EN ISO 4016

Benzeri - Similar - Ähnlich
DIN 601

- Altıköşe Yarım Dış Civata
- Hexagon Head Bolts with Shank
- Sechskantschrauben mit Schaft

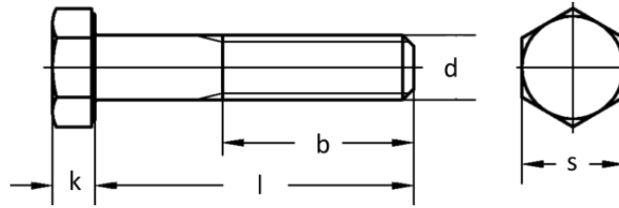

| d | M 5 | M 6 | M 8 | M 10 | M 12 | M 14 | M 16 | M 18 |
|------------------|-------|-------|-------|--------|--------|--------|--------|--------|
| P (pitch) | 0,8 | 1 | 1,25 | 1,5 | 1,75 | 2 | 2 | 2,5 |
| b (l≤125) | 16 | 18 | 22 | 26 | 30 | 34 | 38 | 42 |
| b (125<l≤200) | - | - | - | - | - | 40 | 44 | 48 |
| b (l>200) | - | - | - | - | - | - | - | - |
| k | 3,5 | 4 | 5,3 | 6,4 | 7,5 | 8,8 | 10 | 11,5 |
| s | 8 | 10 | 13 | 16 | 18 | 21 | 24 | 27 |
| l | 25-50 | 30-60 | 40-80 | 45-100 | 55-120 | 60-140 | 65-160 | 80-180 |

| d | M 20 | M 22 | M 24 | M 27 | M 30 | M 33 | M 36 | M 39 |
|------------------|--------|--------|---------|---------|---------|---------|---------|---------|
| P (pitch) | 2,5 | 2,5 | 3 | 3 | 3,5 | 3,5 | 4 | 4 |
| b (l≤125) | 46 | 50 | 54 | 60 | 66 | - | - | - |
| b (125<l≤200) | 52 | 56 | 60 | 66 | 72 | 78 | 84 | 90 |
| b (l>200) | - | 69 | 73 | 79 | 85 | 91 | 97 | 103 |
| k | 12,5 | 14 | 15 | 17 | 18,7 | 21 | 22,5 | 25 |
| s | 30 | 34 | 36 | 41 | 46 | 50 | 55 | 60 |
| l | 80-200 | 90-220 | 100-240 | 110-260 | 120-300 | 130-320 | 140-360 | 150-400 |



POLAR
=FASTENERS=

| d | M 42 | M 45 | M 48 | M 52 | M 56 | M 60 | M 64 |
|------------------|---------|---------|---------|---------|---------|---------|---------|
| P (pitch) | 4,5 | 4,5 | 5 | 5 | 5,5 | 5,5 | 6 |
| b (l≤125) | – | – | – | – | – | – | – |
| b (125<l≤200) | 96 | 102 | 108 | 116 | – | – | – |
| b (l>200) | 109 | 115 | 121 | 129 | 137 | 145 | 153 |
| k | 26 | 28 | 30 | 33 | 35 | 38 | 40 |
| s | 65 | 70 | 75 | 80 | 85 | 90 | 95 |
| l | 180-420 | 180-440 | 200-480 | 200-500 | 240-500 | 240-500 | 260-500 |