




DIN 478

- Kare Başlı Civata
- Square Head Bolts with Collar
- Vierkantschrauben mit Bund

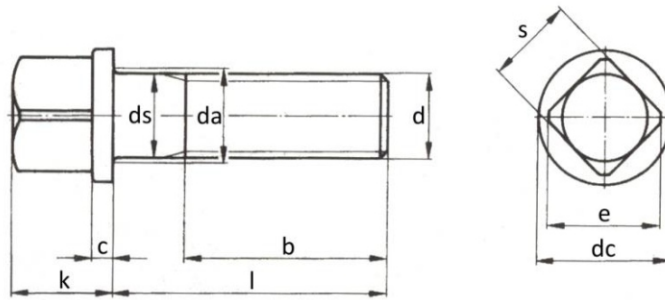

| d | M 5 | M 6 | M 8 | M 10 | M 12 | M 16 | M 20 | M 24 |
|-----------|-------|-------|-------|-------|-------|--------|--------|--------|
| P (pitch) | 0,8 | 1 | 1,25 | 1,5 | 1,75 | 2 | 2,5 | 3 |
| b (l≤125) | 16 | 18 | 22 | 26 | 30 | 38 | 46 | 54 |
| b (l>125) | – | – | – | 32 | 36 | 44 | 52 | 60 |
| ds | 5 | 6 | 8 | 10 | 12 | 16 | 20 | 24 |
| da (max) | 5,7 | 6,8 | 9,2 | 11,2 | 13,7 | 17,7 | 22,4 | 26,4 |
| dc | 9,5 | 10,5 | 13,5 | 16,5 | 19,5 | 25 | 31 | 36 |
| k | 7 | 8 | 10 | 13 | 15 | 20 | 25 | 28 |
| c | 2 | 2 | 2 | 3 | 3 | 4 | 5 | 6 |
| s | 5 | 6 | 8 | 10 | 13 | 17 | 22 | 24 |
| e | 6,5 | 8 | 10 | 13 | 17 | 22 | 28 | 32 |
| l | 10-30 | 10-40 | 16-45 | 20-60 | 25-90 | 30-140 | 35-180 | 35-180 |